

MILAN S.r.l. a socio unico


**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

## Technical Datasheet

# tasker® C188 10x2x0,22 mm<sup>2</sup> Shielded Twisted Pair Cable

  
**RoHS<sub>2</sub>**  
 2002/95/EC  
 2011/65/UE

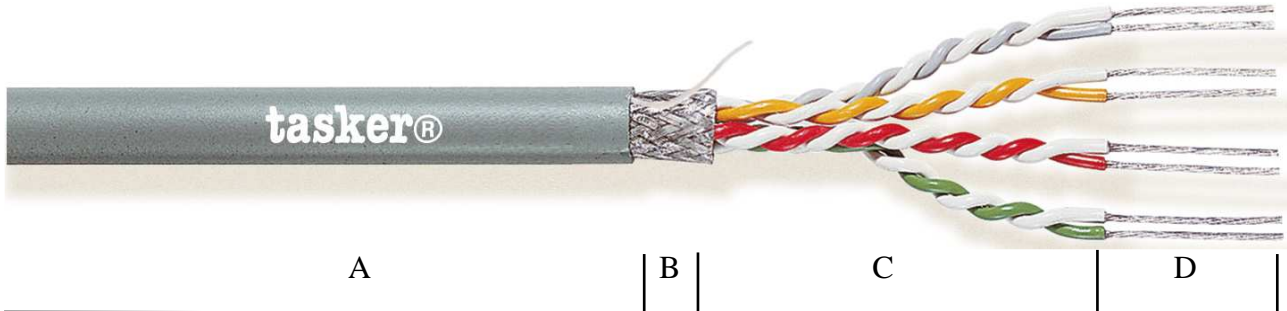

**NOTE**  
**CATEGORY**  
**APPLICATIONS**

The picture does not represent the real number of pairs.  
 S.T.P. Cable (See Data Network Catalogue)  
 Electronic and Data Transmission

- A:** Grey Soft **PVC** Sheath.  
Outer cable Ø: 9,80 (±0,20) mm.
- B:** Shielding in O.F.C. tinned copper Braid, covering 85%
- C:** The cores are stranded in a pairs with 30 twist/m. and insulation with **PVC**. Diam. Ø 1,20 (±0,20) mm.  
Pair color code: White/ Grey, White/ Yellow, White/Red, White/Green, White/Blue, White/Brown, White/Black, Yellow/Grey, Yellow/Red, Yellow/Green.
- D :** O.F.C. tinned copper formation 7x0,20 mm.  
Nom. Cross section 10x2x0,22 mm<sup>2</sup>

**MARKING**

**tasker® C188 10x2x0,22 mm<sup>2</sup> DATA TRASMISSION TWISTED PAIR SHELDED CABLE MADE IN ITALY**

**CUSTOM PRODUCTION**

This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

### Cable Properties

<b>Conductor Resistance</b>	79,15 Ω/Km
<b>Capacity Core/Core</b>	100 pF/mt
<b>Capacity Core/Shield</b>	150 pF/mt
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio
<b>Impiego</b>		Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa
<b>Posa</b>		Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Informazioni</b>		Ver. A / 16.05.17