

# CAVEL®

COAXES 186 - EUROPE

**50<sup>th</sup>**  
**Anniversary**  
**1968 - 2018**

QUALITY IN

## 75 Ohm Coaxial Cables

AND ACCESSORIES

- Preliminaries	2
- Index	3
- CPR Introduction	4-5
- Top CPR Coaxes	6-7
- Broadband triple shield	8-9
- Broadband double shield	10-11
- Drop DG Series	12-13
- Distribution and Trunk	14-15
- Standard Drop & Hibrid	16-17
- Smatv multicore	18-19
- CABLEBOX & Packing system	20-21
- Tools & Connectors	22
- Legend & Disclaimer	23

# PRELIMINARIES

## COMPANY PROFILE

Italiana Conduttori Srl has been producing CAVEL coaxial cables since 1968. During this time the company has achieved continuous growth and major recognition in both the Italian and international markets. The company plant and offices, occupying a surface area of 15,000 sqm, are situated in Gropello Cairoli, in the Province of Pavia, some 30 km along the A7 motorway from Milan en route to Genoa. The company has a production capacity over 100.000 km of cables a year.

## PRODUCTS PROFILE

The costs of designing and building TV distribution networks necessitate products with better performance integrity and longer life.

## CAVEL AN EU PRODUCT MADE IN ITALY

To meet these expectations, CAVEL coaxial cables have been designed to comply with new technological demands. More effective screening techniques have been developed and dimensions reduced, while at the same time enhancing mechanical strength and increasing durability. This has been made possible due to the use of nitrogen gas injected physical foam insulation technology, used for the production of coaxial cable dielectrics. Our service to installers has been improved by the introduction of CABLEBOX dispensers, offering environmental and health and safety benefits, as well as a wide range of connectors and tools.



## A COMPANY THAT RESPECTS THE ENVIRONMENT

CAVEL is compliant with the EU RoHS Directive banning the use of certain hazardous chemical substances. In the past we used lead primarily in PVC sheath compounds as a thermal stabiliser. In accordance with the RoHS Directive, we discontinued the use of lead and its derivatives in all products from March 2005. In addition, Regulation 1907/2006 covering the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) came into force on 1 June 2007. Pursuant to the REACH Regulation, our company is categorised as a downstream “user of substances” and as a “producer of articles”. For further information please visit our website and download our Declaration of Conformity to the RoHS Directive, as well as our Declaration in accordance with the REACH Regulation.

## CAVEL WARRANTY


In recent decades, the updating of our coaxial cable design, the improved quality of our raw materials and the acquisition of modern production equipment have allowed us to guarantee all coaxial cables produced under the CAVEL brand for a period of 15 years. Both the Certificate and Conditions of Warranty can be downloaded from our website.



# INDEX



CPR  
an introduction  
p. 4-5



CPR TOP  
performant coaxes  
p. 6-7



Triple shield  
broadband coaxes  
p. 8-9



Double shield  
broadband coaxes  
RP Series  
p. 10-11



Double shield  
broadband coaxes  
DG Series  
p. 12-13



Distribution  
and trunk coaxes  
p. 14-15



Standard  
and Hybrid  
drop coaxes  
p. 16-17



SMATV twin  
and multicore  
coaxes  
p. 18-19



CABLEBOX and  
Packing system  
p. 20-21



Tools  
and Connectors  
p. 22



Legend and  
Disclaimer  
p. 23

# An introduction to CPR (Construction Product Directive)

## WHAT'S CPR? (EU 305/2011)

The management of CPR firstly has the noble aim to minimize the risks to people and property by reducing the danger of fires. It is the Construction Product Directive that has been applied in all member states of the European Community since July 2013. It concerns the "new era" of power, control and communication cables, both in copper and optical fiber, to be installed in construction works subject to fire requirements of reaction performance. The Directive EU 305/2011 is a Regulation introducing a common technical language and shared evaluation methods that define uniform Euro-Classes, related to cables performance in case of fire.

The conformity of the products with the Regulations is:

- standardized by Spec. EN 50575 in fire reaction requirements, test methods and cable evaluation;
- guaranteed by the DoP (Declaration of Performance) that every manufacturer must issue to the user and by the placement of CE marking on the products;
- specified by each Member State in the declination of Euro-classes according to the applications;
- implemented by designers, builders and users in the selection of appropriate products to be used in specific projects.

## CHARACTERISTICS OF CABLES SUBJECT TO CPR

To meet the requirements of: safety in the event of fire, hygiene, health and the environment, the cables used in construction works must guarantee an adequate reaction to fire and a given release of

dangerous substances.











In fact, the safety of buildings in case of fire is implemented through:

- the limitation in the generation and propagation of fire and smoke,
- allowing the occupants the opportunity to leave the buildings in safe and good time.
- as well as to guarantee a high level of safety to rescue teams.

The Euro-Classification criteria, are expressed in a synthetic codification, which scans the characteristics of the cables according to the following parameters:

- Fire propagation classes, such as: B2ca, Cca, Dca, Eca, Fca;
- the opacity of the fumes produced, which varies in the parameters: from s1 to s3;
- the dripping of the incandescent particles that can propagate the fire, which varies: from d0 to d2;
- the acidity of the fumes, defining the danger to people and the corrosiveness for things and varies: from a1 to a3

In principle, the Euro-Classes adopted in Europe are those shown in the table below. Since each member State is given the faculty to classify and determinate the places where cables are installed according to their reaction to the fire, a more in-depth verification of the appropriate national documents is suggested, case by case.

Classification, use and evaluation of performance, according to CPR - EU Directive 305/11 and Spec. EN 50575/14						
Euro-Class	B <sub>2ca</sub> s1a d1 a1	C <sub>ca</sub> s1a d1 a1	C <sub>ca</sub> s3 d1 a3	D <sub>ca</sub> s1, d2, a1	E <sub>ca</sub>	F <sub>ca</sub>
Risk of Fire	high	middle-high	middle	middle-low	low	OUTDOOR installation and use ONLY
Performance of fire reaction						
Installation	in a bundle				individually installed	
Installation Place subject to each National specifications (acc. to DM139/15 in Italy)						
	under decision of the client or the designer	shopping centers hospitals cinemas schools offices > 25 people	residential estate large offices workshops large storehouses garages	single residences small offices shops < 400 m <sup>2</sup> small storehouses		
DoP Declaration of Performance	yes					under decision of manufacturer
AVCP System Assessment Verification Constasy Performance system	1+			3		4

## CERTIFICATION BODY AND FIRE REACTION REPORT

The Product Classification process starts with the choice of a Notified Body. These institutions are accredited to the European Commission as a Notified Body and they are included in the NANDO (New Approach Notified and Designated Organizational Information System). Cables provided to the Notified Body are submitted to the relevant tests and in case of positive feedback they issue the "Reaction to fire classification report for electric cable".

## THE DOP AND THE UPDATING OF TECHNICAL DATA SHEET

Supported by the positive feedback of the tests and the release of the Classification Report, we are in turn authorized to draw up the corresponding DoP - Declaration of Performance, by which we assume the responsibility to declare the fire reaction Class. See the example by side. This document is public and it may be required at our company at any time. For service to anyone who needs it, this document is already available on the corporate website as well. It's easy to trace it by navigating into our web site up to the Data Sheet of each specific cable.

Dichiarazione di Prestazione (DoP) Declaration of Performance (DoP) n° 1711091550	
1. Codice identificativo del prodotto / Identification code of the product type <b>DG 113 ZH</b>	
2. Numero di lotto / Batch number <b>impresso sul cavo, sugli imballi e sui documenti di trasporto printed on the cable, on the packaging and on transport documents</b>	
3. Usi previsti del prodotto / Intended use of the construction product <b>Cavo di trasporto dati e segnali RF adatto in costruzioni ed altre opere di ingegneria civile con l'obiettivo di limitare la produzione e la diffusione del fuoco e del fumo. Data transport and RF signals cable to be used in buildings and civil works with the aim of limiting the production and spread of fire and smoke.</b>	
4. Nome, ragione sociale o marchio di fabbrica e indirizzo di contatto del produttore Name, registered trade name or registered trade mark and contact address of the manufacturer <b>ITALIANA CONDUOTTORI SRL, manufacturer of coaxial and LAN cables with the CAVEL trade mark Viale Zanotti 90, 27027 Grappello Cairoli, Italy Phone +39 0382 815150 Fax +39 0382 814212 email: cavel@cavel.it www.cavel.it</b>	
5. Sistemi di valutazione e verifica di costanza delle prestazioni del prodotto Systems of assessment and verification of constancy of performance of the product <b>AVCP3</b>	
6. In caso di dichiarazione di prestazione relativa ad un prodotto da costruzione coperto da norma armonizzata In case of the declaration of performance concerning product covered by a harmonized standard <b>Ente certificatore di prodotto notificato n° 0051 ha eseguito la determinazione del tipo di prodotto, il collaudo Inpetito dei campioni presi prima di immettere il prodotto sul mercato e pubblica il certificato di costanza di prestazione. Notified product certification body No. 0051 performed the determination of product type, the audit testing of samples taken before placing the product on the market and issued the certificate of performance.</b>	
7. Prestazione dichiarata / Declared performance	
Caratteristiche essenziali Essential characteristics	Prestazione Performance
Reazione al fuoco / Reaction to fire	<b>D<sub>ca</sub> s2,d2,a1</b>
Sistemi passivi / Passive systems	<b>assenti / none</b>
Specifiche tecniche armonizzate Harmonized technical specifications <b>EN 50275:2014</b>	
8. La prestazione del prodotto identificata nei punti 1 e 2 è conforme alla prestazione dichiarata nel punto 7. Questa dichiarazione di prestazione è stata redatta sotto l'esclusiva responsabilità del produttore identificato al punto 4. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 7. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.	
Firmato per conto del produttore da: / Signed for and on behalf of the manufacturer by: <b>Luca Bionca (Direttore Generale / General Manager)</b>	
Luogo e data di pubblicazione / place and date of issue: <b>Grappello Cairoli, 9 novembre 2017 Grappello Cairoli, November 9, 2017</b>	

## CE MARKING AND CABLE LABELLING

Conforming to instructions of CEI EN 50575 standards we apply to any single cable's packing unit one so called CE label, whose example is shown on the left side. On the contrary, the label shown on the right side appears on any outer cardboard box or wooden drum, where the Production Lot is also clearly visible.

## CPR STATEMENTS ON CABLE'S JACKET

Together with the Euro-Class indication the Production Lot is also printed on the cable's outer jacket, whose code: dddyy (n), provides the following data:

ddd means the day of production (001-365)  
yy the year of production  
(n) the possible progressive number, if any



We remember that on our website [www.cavel.com](http://www.cavel.com) you can find deeper information and updates about the application of CPR statements in our production company as well as that you can download your own the relevant DoP of each cable, in addition to the relevant Data Sheets.



Euroclass Dca s2,d2,a1 EN50117-2-5 CEI-UNEL 36762 C-4 (U0=400V) ULTRA HD/4K 08618 n 499

**Euro -Class CPR Eu 305/11**

**Production Lot nr.**

# CPR TOP PERFORMANT COAXES - TRIPLE SHIELD BROADBAND COAXIAL CABLES

Application		Broadband CATV Networks; Triple Play Networks; 4K-UltraHD resolution; LTE protection				
Standards		EN50117	2-4	2-4	2-4	2-4
CPR Class acc. to		UE 305/2011	B2ca s1a d1 a1	Cca s1a d1 a1	B2ca s1a d1 a1	Cca s1a d1 a1
CAVEL Code		TS613B	TS613C	TS713B	TS713C	TS11B
RG Ref.		RG6	RG6	RG6+	RG6+	RG11
CONSTRUCTION DATA						
Inner Conductor	Ø mm	1,00		1,13		1,63
	material	Cu		Cu		Cu
Dielectric	Ø mm	4,60		4,80		7,20
	material	PEG		PEG		PEG
Screen						
1. Film Foil Laminate		material	APAS	APAS		APAS
2. Braid		material	CuSn	CuSn		CuSn
Braid Optical Coverage		%	73	71		63
3. Overlapped Film Foil	Ø mm	5,17		5,37		7,85
	material	AP		AP		AP
Outer Sheath	Ø mm	6,90		7,00		10,30
	material	LSZH-FR+	LSZH-FR	LSZH-FR+	LSZH-FR	LSZH-FR+
PHYSICAL DATA						
Copper Contents	kg/km	17,2		19,4		34,1
Cable Weight	kg/km	54,0	51,7	52,7	50,6	100,9
Min. Bending Radius 1/n	mm	35 / 70		35 / 70		100
Max. Tensile Strength	N	120		150		300
ELECTRICAL DATA						
Impedance	Ohm	75±3		75±3		75±2
Capacitance	pF/m	54±2		52±2		52±2
Velocity Ratio	%	82		85		85
Attenuation (at 20°C)						
⊞ 5 MHz	dB/100m	1,5		1,4		0,9
⊞ 10 MHz	dB/100m	2,2		1,9		1,3
⊞ 30 MHz	dB/100m	3,4		3,0		2,0
⊞ 50 MHz	dB/100m	4,4		3,8		2,6
⊞ 200 MHz	dB/100m	8,5		7,5		5,0
⊞ 300 MHz	dB/100m	10,6		9,3		6,2
⊞ 470 MHz	dB/100m	13,4		11,7		7,9
⊞ 862 MHz	dB/100m	18,5		16,0		10,8
⊞ 1000 MHz	dB/100m	20,1		17,3		11,8
⊞ 1750 MHz	dB/100m	27,3		23,4		16,1
⊞ 2150 MHz	dB/100m	30,6		26,1		18,2
⊞ 2400 MHz	dB/100m	32,6		27,8		19,4
⊞ 3000 MHz	dB/100m	37,1		31,5		25,4
Structural Return Loss (SRL)						
⊞ 5 - 470 MHz	dB	> 30		> 30		> 30
⊞ 470 - 1000 MHz	dB	> 28		> 28		> 28
⊞ 1000 - 2000 MHz	dB	> 26		> 26		> 23
⊞ 2000 - 3000 MHz	dB	> 22		> 22		> 20
Transfer Impedance (Zt)						
⊞ 5 - 30 MHz	mΩ/m	< 0,9		< 0,9		< 2,5
Screening Attenuation (SA)						
Typical Value	dB	> 120		> 120		> 115
DC Resistance inner/outer	Ohm/km	22,5 / 10,4		18 / 10,0		8,5 / 7,5
Loop Resistance	Ohm/km	32,9		28,0		16,0
Sheath Insulation Voltage	kV	3		3		8
Max. Current (I eff)	A	6		8		16
STANDARD PACKING						
Put-up	mode	reel		reel		drum
Unit Length	m	100		100		500
Unit Packing Content	m	500		500		500
Packing Pattern	mod.	R100M		R100M		PD500
Fits CABLEBOX	item	DS100		DS100		-




2-3 Cca s1a d1 a1	2-3 B2ca s1a d1 a1	2-3 Cca s1a d1 a1	2-3 B2ca s1a d1 a1	2-3 Cca s1a d1 a1
<b>TS11C</b> RG11	<b>TS22B</b>	<b>TS22C</b>	<b>TS27B</b>	<b>TS27C</b>
	2,20		2,70	
	Cu		Cu	
	9,90		11,50	
	PEG		PEG	
	APAS		APAS	
	CuSn		CuSn	
	64,0		64,1	
	10,84		12,32	
LSZH-FR	13,10	LSZH-FR	15,30	LSZH-FR
96,7	61,9	163,0	83,5	216,7
	169,6		225,7	
	130		150	
	600		800	
	75±2		75±2	
	52±2		52±2	
	85		85	
	0,8		0,8	
	1,1		1,0	
	1,5		1,3	
	2,0		1,7	
	4,0		3,4	
	4,9		4,3	
	6,4		5,4	
	9,1		7,5	
	9,8		8,2	
	13,3		11,3	
	14,9		12,9	
	15,7		13,6	
	18,3		15,3	
	> 30		> 25	
	> 28		> 24	
	> 23		> 23	
	> 20		> 22	
	A+		A++	
	< 2,5		< 0,9	
	A++		A++	
	> 115		> 115	
	5 / 4,5		3,4 / 3,5	
	9,5		6,9	
	8		8	
	21		25	
	drum		drum	
	500		500	
	500		500	
	WD500		WD500	
	-		-	

## CPR IN EUROPE

Many European Fire Regulations today can be covered by 4 CPR Classes of power, control and communication cables. All of them under one community Directive 305/2011 and the right application in each country needs the detailed knowledge of the relevant national rules.



# TRIPLE SHIELD BROADBAND COAXIAL CABLES

Application Standards Certification by 		Broadband CATV Networks; Triple Play Networks; 4K-UltraHD resolution; LTE protection				
EN50117		2-4	2-4 Nr. 00017	2-5	2-4	2-4 Nr. 00022
CPR Class acc. to	UE 305/2011	Dca s1, d2, a1	Eca	Fca	Eca	Eca
CAVEL Code		TS703JZH	TS703J	TS703JPE	TS61L	TS80L
RG Ref.		RG6+			RG6EU	RG59EU
CONSTRUCTION DATA						
Inner Conductor	Ø mm	1,13			1,00	0,80
	material	Cu			Cu	Cu
Dielectric	Ø mm	4,80			4,80	3,50
	material	PEG			PEG	PEG
Screen						
1. Film Foil Laminate	material	APAS			APAS	APA
2. Braid	material	CuSn			CuSn	CuSn
Braid Optical Coverage	%	45			45	65
	Ø mm	5,37			5,37	4,00
3. Overlapped Film Foil	material	APJ			AP	AP
Shorting Fold Film Foil (J)	material					
Outer Sheath	Ø mm	6,90			6,60	5,20
	material	LSZH	PVC	PE	PVC	PVC
PHYSICAL DATA						
Copper Contents	kg/km	14,6			12,6	11,1
Cable Weigth	kg/km	46,3	43,9	38,9	40,3	28,4
Min. Bending Radius 1/n	mm	35 / 70			35 / 70	25 / 50
Max. Tensile Strength	N	150			120	90
ELECTRICAL DATA						
Impedance	Ohm	75±3			75±3	75±3
Capacitance	pF/m	52±2			54±2	52±2
Velocity Ratio	%	85			82	85
Attenuation (at 20°C)						
α 5 MHz	dB/100m	1,6			2,0	2,1
α 10 MHz	dB/100m	2,3			2,3	2,9
α 30 MHz	dB/100m	3,2			3,5	4,5
α 50 MHz	dB/100m	4,1			4,6	5,7
α 200 MHz	dB/100m	8,0			8,6	11,1
α 300 MHz	dB/100m	9,8			10,8	13,7
α 470 MHz	dB/100m	12,5			13,6	17,4
α 862 MHz	dB/100m	17,2			18,8	24
α 1000 MHz	dB/100m	18,6			20,4	25,9
α 1750 MHz	dB/100m	25,2			27,8	35,1
α 2150 MHz	dB/100m	28,1			31,1	39,5
α 2400 MHz	dB/100m	29,7			32,4	42,2
α 3000 MHz	dB/100m	33,7			37,3	48,0
Structural Return Loss (SRL)						
α 5 - 470 MHz	dB	> 30			> 30	> 30
α 470 - 1000 MHz	dB	> 28			> 28	> 28
α 1000 - 2000 MHz	dB	> 26			> 26	> 26
α 2000 - 3000 MHz	dB	> 22			> 22	> 22
Transfer Impedance (Zt)						
α 5 - 30 MHz	Class	A			A+	A++
	mΩ/m	< 2,5			< 2,5	< 0,9
Screening Attenuation (SA)						
	Class	A++			A++	A++
Typical Value	dB	> 120			> 120	> 125
DC Resistance inner/outer	Ohm/km	18 / 14			22,5 / 14	35 / 13,5
Loop Resistance	Ohm/km	32,0			36,5	48,5
Sheath Insulation Voltage	kV	3			3	2,5
Max. Curret (I eff)	A	8			6	4
STANDARD PACKING						
Put-up	mode	coil	reel		coil	coil
Unit Length	m	100-250-500	100-250		100-250-500	150
Unit Packing Content	m	500	600-500		500	900
Packing Pattern	mod.	R100M-R250L-R500XL	S100M-S250L		R100M-R250L-R500XL	S150M
Fits CABLEBOX	item	DS100-250 none	DS100-DS250		DS100-250 none	DS100



2-3

Fca

**TS11J**

RG11

1,63  
Cu  
7,20  
PEG

APAS  
CuSn  
63  
7,85

APJ

10,30  
PE

34,6  
86,7  
100  
300

75±2  
52±2  
85

1,1  
1,5  
2,2  
2,8  
5,6  
6,9  
8,8

11,9  
12,8  
17,9  
19,8  
21,0  
24,5

> 30  
> 28  
> 23  
> 20

A+  
< 2,5

A++  
> 120  
8,5 / 7,5

16,0  
8  
16

drum

500

1x500

PD500

none

## COAXIALS FOR TRIPLE PLAY DIGITAL NETWORKS TRIPLE SHIELD COAXES – TS Series

The market demand for products offering high screening performance for use in digital broadband communication systems is growing day by day. This is due on the one hand to the increasing number of transmission systems and, on the other hand, to the demand for digital TV programming such as PPV and VOD. Furthermore many operators now offer digital services for internet and digital telephony. Altogether these comprise the so-called Triple Play digital network.

This applies to distribution and reception systems in different fields, including terrestrial, satellite and cable broadband TV networks. All such systems require coaxial cables with more efficient screening features, especially in the so-called Return Path frequency range.



We have introduced two series of cables which both offer the highest Screening Attenuation of Class A++, according to EN50117 specifications.

The TS Series includes coaxials provided with the special J-Shorting- Fold Screen. This is an innovative Triple Shielded screen that affords excellent screening attenuation (SA) along the full frequency bandwidth range 30-3000 MHz.


It consists of:

1. An Al/Pet/Al foil film bonded to the dielectric (APAS);
2. One conventional braid of CuSn wires; cable broadband TV networks.
3. Another Al/Pet foil film (AP) over the braid, which is folded back over itself on the overlapping section.

The combination of these screening components guarantees the stability of the SA values, which are close to those provided by a real metal tube while keeping the cable's flexibility within acceptable limits for easy handling during installation.

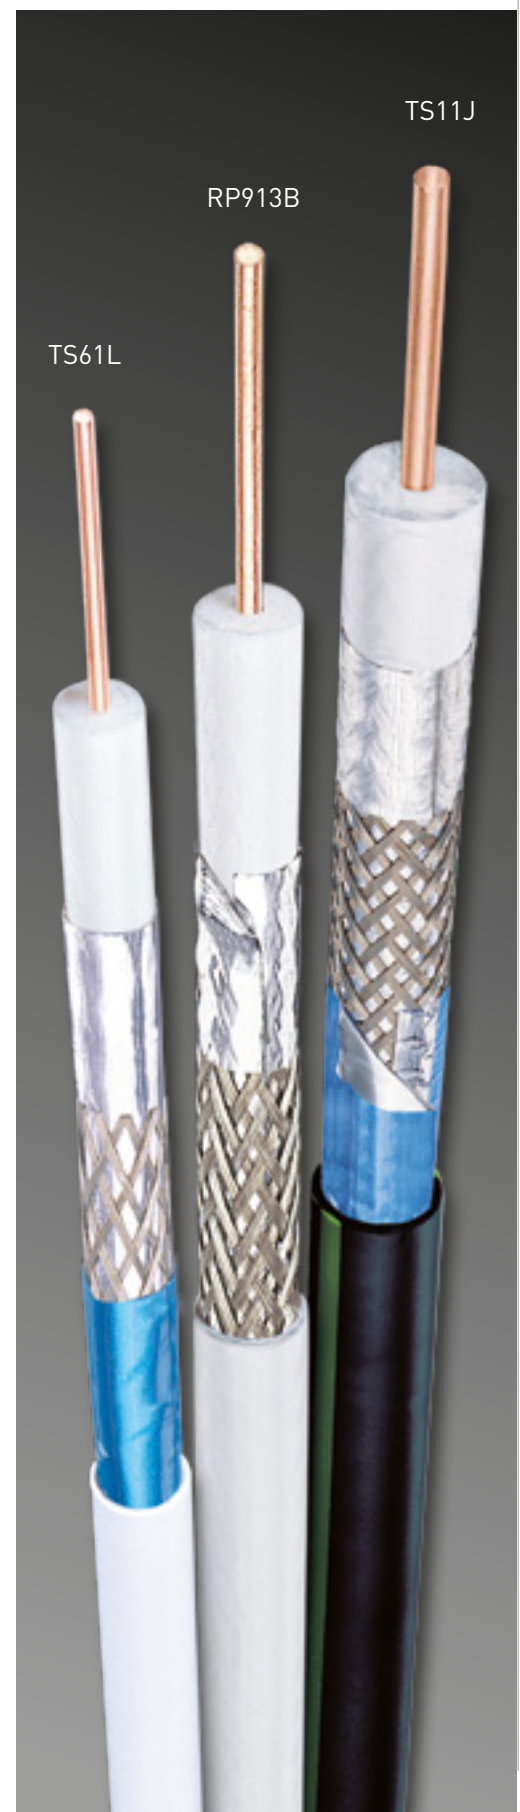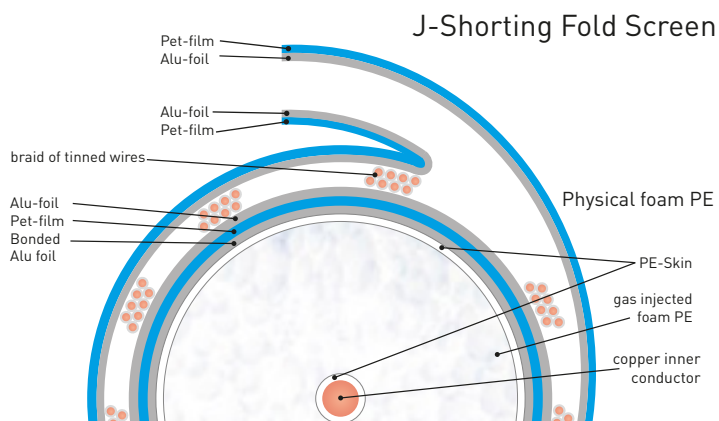

# DOUBLE SHIELD BROADBAND COAXIAL COAXES

Application	EN50117	Broadband CATV Networks; Triple Play Networks; 4K-UltraHD resolution; LTE protection						
Standards		2-5	2-4	2-5	2-4	2-4	2-5	2-4
Certification by		Nr.00018						
CPR Class acc. to	UE305/2011	Dca s2, d2, a1	Eca	Fca	Eca	Eca	Dca s2, d2, a1	Eca
CAVEL Code		RP913ZH	RP913B	RP913PE	RP61B	RP80B	RP705ZHB	RP705B
RG Ref.		RG6+			RG6EU	RG59EU	RG6+	
CONSTRUCTION DATA								
Inner Conductor	Ø mm	1,13			1,00	0,80	1,13	
	material	Cu			Cu	Cu	Cu	
Dielectric	Ø mm	4,80			4,80	3,50	4,80	
	material	PEG			PEG	PEG	PEG	
Screen								
1. Film Foil Laminate	material	AP			APS	AP	AP	
2. Braid	material	CuSn			CuSn	CuSn	Al	
Braid Optical Coverage	%	72			52	79	43	
	Ø mm	5,30			5,37	4,05	5,38	
Outer Sheath	Ø mm	6,60			6,60	5,20	6,80	
	material	LSZH	PVC	PE	PVC	PVC	LSZH	PVC
PHYSICAL DATA								
Copper Contents	kg/km	19,1			13,7	13,7	8,9	
Cable Weight	kg/km	46,0	43,6	41,0	41,4	33,2	40,1	37,8
Min. Bending Radius 1/n	mm	35 / 70			35 / 70	25 / 50	35 / 70	
Max. Tensile Strength	N	150			150	90	150	
ELECTRICAL DATA								
Impedance	Ohm	75±3			75±3	75±3	75±3	
Capacitance	pF/m	52±2			52±2	52±2	52±2	
Velocity Ratio	%	85			82	85	85	
Attenuation (at 20°C)								
at 5 MHz	dB/100m	1,4			1,7	1,9	1,5	
at 10 MHz	dB/100m	1,9			2,3	2,6	2,0	
at 30 MHz	dB/100m	3,0			3,5	4,2	3,1	
at 50 MHz	dB/100m	4,0			4,5	5,5	4,0	
at 200 MHz	dB/100m	8,1			8,7	11,2	8,1	
at 300 MHz	dB/100m	9,9			10,7	13,9	10,0	
at 470 MHz	dB/100m	12,6			13,6	17,5	12,6	
at 862 MHz	dB/100m	17,3			18,8	24,2	17,3	
at 1000 MHz	dB/100m	18,7			20,3	26,2	18,7	
at 1750 MHz	dB/100m	25,7			27,6	35,3	25,7	
at 2150 MHz	dB/100m	28,8			30,9	39,6	28,9	
at 2400 MHz	dB/100m	30,6			32,8	42,2	30,6	
at 3000 MHz	dB/100m	34,1			37,2	48,0	35,0	
Structural Return Loss (SRL)								
at 5 - 470 MHz	dB	> 30			> 30	> 30	> 30	
at 470 - 1000 MHz	dB	> 28			> 28	> 28	> 28	
at 1000 - 2000 MHz	dB	> 26			> 26	> 26	> 26	
at 2000 - 3000 MHz	dB	> 22			> 22	> 22	> 22	
Transfer Impedance (Zt)								
at 5 - 30 MHz	mΩ/m	< 2,5			< 5	< 0,9	< 15	
Screening Attenuation (SA)								
Class		A++			A+	A++	A+	
Typical Value	dB	> 120			> 105	> 120	> 105	
DC Resistance inner/outer	Ohm/km	18 / 10,7			22,5 / 13,2	35 / 11,8	18 / 22	
Loop Resistance	Ohm/km	28,7			35,7	46,8	40,0	
Sheath Insulation Voltage	kV	3			3	2,5	3	
Max. Current (I eff)	A	8			6	4	8	
Standard Packing								
Put-up	mode	coil	reel		coil	coil reel	coil	reel
Unit Length	m	100-250-500	100-250		100	150 150	100-250-500	100-250
Unit Packing Content	m	500	600-500		500	750 900	500	600-500
Packing Pattern	mod.	R100M-R250L-R500XL	S100M-S250L		R100M	R150M S150M	R100M-R250L-R500XL	S100M-S250L
Fits CABLEBOX	item	DS100-250 none	DS100-DS250		DS100	DS100 DS100	DS100-250 none	DS100-DS250



2-5

2-4

Fca

Eca

RP705P

RP65B

RG6EU

1,00  
Cu  
4,80  
PEG

AP  
Al  
43  
5,38

6,60  
PVC

PE

32,4

7,0  
36  
35 / 70  
150

75±3  
54±2  
82

1,5  
2,1  
3,3  
4,3  
8,7  
11,1  
13,6  
18,8  
20,4  
27,7  
31,1  
33,1  
37,7

> 30  
> 28  
> 26  
> 22


C  
< 20  
A+

> 105  
22,5 / 22  
44,5  
3  
8



coil reel  
100-500 100  
500 600  
R100M-R500XL S100M  
DS100 none DS100

## COAXIALS FOR TRIPLE PLAY DIGITAL NETWORKS DOUBLE SHIELD COAXES - RP Series

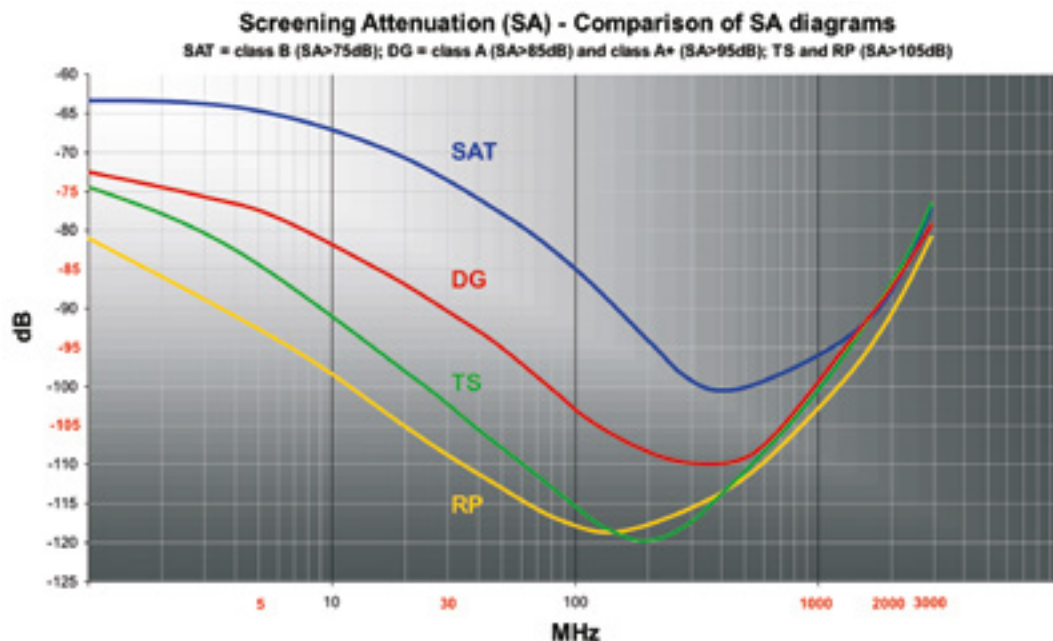The RP Series includes Double Shielded coaxials performing as well the highest possible screening efficiency along Return Path frequencies. This is due to the use of a thicker Al foil film over the dielectric.



## DOUBLE SHIELD COAXIAL CABLES

Application		Satellite and Digital Terrestrial reception and distribution; 4K-UltraHD resolution; LTE protection							
Standards	EN50117	2-4	2-4	2-5	2-4	2-4	2-5	2-4	
CPR Class acc. to	UE 305/2011	Eca	Eca	Dca s2, d2, a1	Eca	Eca	Dca s2, d2, a1	Eca	
CAVEL Code		CW41S	DG70-C	DG80ZH	DG80-C	2xDG80	DG113ZH	DG113	
RG Ref.		mini RG59		RG59EU			RG6EU		
CONSTRUCTION DATA									
Inner Conductor	Ø mm	0,41	0,70	0,80			1,13		
	material	FeCu	Cu	Cu			Cu		
Dielectric	Ø mm	1,90	2,90	3,50			4,80		
	material	PEG	PEG	PEG			PEG		
Screen									
1. Film Foil Laminate	material	APAS	APA	APA			APA		
2. Braid	material	CuSn	CuSn	CuSn			CuSn		
Braid Optical Coverage	%	70	73	65			72		
	Ø mm	2,47	3,40	4,00			5,30		
FeZn Messenger	Ø mm								
Outer Sheath	Ø mm	3,60	4,30	5,00		11,0x5,0	6,60	6,60	
	material	PVC	PVC	ZH	PVC	PVC	LSZH	PVC	
stripes colours									
PHYSICAL DATA									
Copper Contents	kg/km	4,3	10,0	11,1		22,3	19,2		
Cable Weight	kg/km	14,7	20,8	26,6	25,7	55,9	45,2	43,4	
Min. Bending Radius 1/n	mm	15 / 30	20 / 40	25 / 50			35 / 70		
Max. Tensile Strength	N	120	80	90			150		
ELECTRICAL DATA									
Impedance	Ohm	75±3	75±3	75±3			75±3		
Capacitance	pF/m	55±3	52±2	52±2			52±2		
Velocity Ratio	%	82	85	85			85		
Attenuation (at 20°C)									
⌚ 5 MHz	dB/100m	3,8	2,5	2,1			1,6		
⌚ 10 MHz	dB/100m	5,4	3,5	3,0			2,3		
⌚ 30 MHz	dB/100m	8,6	5,2	4,4			3,2		
⌚ 50 MHz	dB/100m	10,6	6,7	5,7			4,1		
⌚ 200 MHz	dB/100m	21,2	13,0	11,0			8,0		
⌚ 300 MHz	dB/100m	26,2	15,9	13,5			9,8		
⌚ 470 MHz	dB/100m	33,0	20,2	16,8			12,4		
⌚ 862 MHz	dB/100m	45,1	27,8	23,0			17,1		
⌚ 1000 MHz	dB/100m	48,7	29,9	24,9			18,5		
⌚ 1750 MHz	dB/100m	65,4	40,3	33,5			24,9		
⌚ 2150 MHz	dB/100m	73,0	45,0	37,4			27,9		
⌚ 2400 MHz	dB/100m	77,4	47,9	39,6			29,6		
⌚ 3000 MHz	dB/100m	87,4	53,7	44,8			33,4		
Structural Return Loss (SRL)									
⌚ 5 - 470 MHz	dB	> 29	> 30	> 30			> 30		
⌚ 470 - 1000 MHz	dB	> 27	> 28	> 28			> 28		
⌚ 1000 - 2000 MHz	dB	> 22	> 26	> 26			> 26		
⌚ 2000 - 3000 MHz	dB	> 18	> 22	> 22			> 22		
Transfer Impedance (Zt)	Class	B	B	B			A		
⌚ 5 - 30 MHz	mΩ/m	< 10	< 7	< 9			< 5		
Screening Attenuation (SA)	Class	A	A	A			A+		
Typical Value	dB	> 105	> 105	> 105			> 105		
DC Resistance inner/outer	Ohm/km	310 / 30	45,5 / 19,6	35 / 18,6			18 / 13,9		
Loop Resistance	Ohm/km	340,0	65,1	53,6			31,9		
Sheath Insulation Voltage	kV	2,5	2,5	2,5			3,0		
Max. Curret (I eff)	A	n.a.	3	4			8		
Standard Packing									
Put-up	mode	reel	coil	coil			reel		
Unit Length	m	100	200	150			100-250		
Unit Packing Content	m	500	1200	900			600-500		
Packing Pattern	mod.	R100S	S200M	S150M			S100M-R250L		
Fits CABLEBOX	item	-	DS100	DS100			DS100-DS250		



2-3	2-4	2-5	2-3	2-3	2-3	2-3
Fca	Eca	Dca s2, d2, a1	Fca	Fca	Fca	Fca
<b>DG113PEM</b>	<b>SAT752F</b> RG6EU	<b>DG163ZH</b> RG11	<b>DG163</b>	<b>CATV11</b> RG11	<b>CATV11AP</b>	<b>RG11FC</b> RG11
1x1,25	1,13	1,63		1,63		1,63
	Cu	Cu		Cu		FeCu
	4,80	7,20		7,20		7,20
	PEG	PEG		PEG		PEG
	Cu/Pet	APAS		APAS		APAS
	Cu	CuSn		CuSn		Al
	72	78		63		65
	5,30	7,85		7,85		8,01
11,2x6,8	6,60	10,10	PE	10,10	7x0,80	10,10
PE	PVC	LSZH		PE		PE
60,3	22,8	39,6	91,7	34,6	123,8	none
	45,9	105,4		85,7		73,7
	35 / 70	100		100		100
	150	300		300		800
	75±3	75±2		75±2		75±2
	52±2	52±2		52±2		53±2
	85	85		85		85
	1,4	1,1		1,1		1,1
	2,0	1,5		1,5		1,5
	2,9	2,2		2,2		2,2
	3,8	2,8		2,8		2,8
	7,7	5,6		5,6		5,6
	9,4	6,9		6,9		6,9
	12,1	8,8		8,8		8,8
	16,7	11,9		11,9		12,3
	18,0	12,8		12,8		13,2
	24,5	17,9		17,9		18,5
	27,5	19,8		19,8		20,8
	29,0	21,0		21,0		22,2
	33,0	24,0		24,0		25,3
	> 30	> 30		> 30		> 30
	> 28	> 28		> 28		> 28
	> 26	> 23		> 23		> 23
	> 22	> 20		> 20		> 20
	A	A		B		B
	< 5	< 5		< 8		< 15
	A+	A+		A		A
	> 110	> 115		> 105		> 95
	18 / 12,5	8,5 / 7,5		8,5 / 10		37,5 / 11,5
	30,5	16,0		18,5		49,0
	3,0	8,0		8,0		8,0
	8	16		16		8
	coil	drum		drum		drum
	100	500		500		500
	600	500		500		500
	S100M	PD500		PD500		PD500
	DS100	-		-		-



# DISTRIBUTION AND TRUNK COAXES-Outdoor, Underground and Hung-Up Installations

<b>Application</b>		Broadband CATV Networks; Triple Play Networks; 4K-UltraHD resolution; LTE protection						
<b>Standards</b>	EN50117	2-5	2-3	2-3	2-3			2-3
<b>CPR Class acc. to</b>	UE 305/2011	Fca	Fca	Fca	Dca s2, d2, a1	Fca	Fca	Fca
<b>CAVEL code</b>		<b>11/50FC</b>	<b>17/73FC</b>	<b>TS20/91L</b>	<b>22/99ZH</b>	<b>22/99FC</b>	<b>22/99AP</b>	<b>TS22/99J</b>
		RG6EU	RG11					
<b>CONSTRUCTION DATA</b>								
<b>Inner Conductor</b>	Ø mm	1,13	1,63	2,00	2,20			2,20
	material	Cu	Cu	Cu	Cu			Cu
<b>Dielectric</b>	Ø mm	4,80	7,20	9,10	9,90			9,90
	material	PEG	PEG	PEG	PEG			PEG
<b>Screen</b>								
1. Film Foil Laminate	material	Cu/Pet	Cu/Pet	APAS	Cu/Pet			APAS
2. Braid	material	Cu	Cu	CuSn	Cu			CuSn
Braid Optical Coverage	%	60	64	68	55			64
	Ø mm	5,38	7,78	9,92	10,48			10,84
3. Overlapped Film Foil	material			AP				AP-J
3. Shorting Fold Film Foil -J	material							
Flooding Compound Filling	material	PJ	PJ			PJ	PJ	
FeZn Messenger	size mm						7x0,80	
<b>Outer Sheath</b>	size mm	7,30	10,10	12,50	12,70		18,5x12,7	13,10
	material	PE	PE	PE	LSZH	PE	PE	PE
<b>PHYSICAL DATA</b>								
<b>Copper Content</b>	kg/km	22,4	40	54,9	59,6			61,9
<b>Cable Weight</b>	kg/km	49,5	88,2	133,7	149,3	130,4	174,3	135,4
<b>Min. Bending Radius</b>	mm	50	100	125	150			150
<b>Max. Tensile Strength</b>	N	200	300	600	600			600
<b>Messenger Max. Tensile Strength</b>	N				5.000			
<b>ELECTRICAL DATA</b>								
<b>Impedance</b>	Ohm	75±2	75±2	75±2	75±2			75±2
<b>Capacitance</b>	pF/m	52±2	52±2	52±2	52±2			52±2
<b>Velocity ratio</b>	%	85	85	85	85			85
<b>Attenuation (at 20°C)</b>								
at 5 MHz	dB/100m	1,5	1,1	1,0	0,8			0,8
at 10 MHz	dB/100m	2,1	1,5	1,3	1,1			1,1
at 30 MHz	dB/100m	2,9	1,9	1,8	1,5			1,5
at 50 MHz	dB/100m	3,8	2,5	2,3	2,0			2,0
at 200 MHz	dB/100m	7,9	5,3	4,6	4,0			4,0
at 300 MHz	dB/100m	9,7	6,5	5,7	4,9			4,9
at 470 MHz	dB/100m	12,0	8,3	7,1	6,4			6,4
at 862 MHz	dB/100m	16,8	11,5	10	9,1			9,1
at 1000 MHz	dB/100m	17,9	12,4	10,9	9,8			9,8
at 1750 MHz	dB/100m	24,8	17,1	14,8	13,3			13,3
at 2150 MHz	dB/100m	27,3	19,2	16,5	14,9			14,9
at 2400 MHz	dB/100m	29,1	20,4	17,6	15,7			15,7
at 3000 MHz	dB/100m	33,0	23,3	19,8	18,3			18,3
<b>Structural Return Loss (SRL)</b>								
at 5 - 470 MHz	dB	> 30	> 30	> 26	> 30			> 30
at 470 - 1000 MHz	dB	> 28	> 28	> 22	> 28			> 28
at 1000 - 2000 MHz	dB	> 26	> 23	> 22	> 23			> 23
at 2000 - 3000 MHz	dB	> 20	> 20	> 20	> 20			> 20
<b>Transfer Impedance (Zt)</b>	Class	B	B	A++	B			A+
at 5 - 30 MHz (TI)	mΩ/m	< 11	< 7	< 0,9	< 8			< 2,5
<b>Screening Attenuation (SA)</b>	class	A	A	A++	A			A++
<b>Typical Value</b>	dB	> 100	> 95	> 135	> 105			> 120
<b>DC Resistance: inner / outer</b>	Ohm/km	18 / 13,5	8,5 / 9,5	5,5 / 4	5 / 8,5			5 / 4,5
<b>Loop Resistance</b>	Ohm/km	31,5	18,0	9,5	13,5			9,5
<b>Sheath Insulation Voltage</b>	kV	8	8	8	8			8
<b>Max. Current (I eff)</b>	A	8	16	21	21			21
<b>Standard Packing</b>								
<b>Put-up</b>	mode	drum	drum	drum	drum			drum
<b>Unit Length</b>	m	500	500	500	500			500
<b>Unit Packing Content</b>	m	500	500	500	500			500
<b>Packing Pattern</b>	mod.	PD500	PD500	PD500	PD500		WD500	WD500



2-3	Dca s2, d2, a1	Fca	Fca	2-3	Fca	Fca	2-3	Dca s2, d2, a1	Fca	Fca
27/115ZH	27/115FC	27/115AP	TS27/115J	34/145ZH	34/145FC	34/145AP				
2,70			2,70	3,40						
Cu			Cu	Cu						
11,50			11,50	14,50						
PEG			PEG	PEG						
Cu/Pet			APAS	Cu						
Cu			CuSn	Cu						
52			64	61						
12,2			12,32	15,26						
			AP-J							
	PJ	PJ			PJ	PJ				
		7x0,80				7x0,80				
15,00	PE	225x15	15,30	19,80	PE	25,5x19,8				
LSZH		PE	PE	LSZH		PE				
83,9			83,5	153,5						
208,3	179,9	222,1	182,7	387,8	329,7	350,6				
200				250						
800				1.200						
5.000				5.000						
75±2			75±2	75±2						
52±2			52±2	53±2						
85			85	85						
0,8			0,8	0,5						
1,1			1,1	0,7						
1,3			1,3	1,1						
1,7			1,7	1,4						
3,4			3,4	2,9						
4,2			4,2	3,6						
5,5			5,5	4,6						
7,7			7,7	6,4						
8,4			8,4	6,9						
11,4			11,4	9,4						
12,8			12,8	10,6						
13,6			13,6	11,5						
15,4			15,4	13,3						
> 25			> 25	> 25						
> 24			> 24	> 24						
> 23			> 23	> 21						
> 22			> 22	> 20						
A			A+	A+						
< 5			< 2,5	< 2,5						
A+			A++	A+						
> 115			> 120	> 110						
3,4 / 5,8			3,4 / 3,5	2,1 / 2,6						
9,2			6,9	4,7						
8			8	12						
25			25	34						
drum			drum	drum						
500			500	700						
500			500	700						
WD500			WD500	WD700						




## STANDARD DROP COAXES - SA Class B

Application		Satellite and Digital Terrestrial reception and distribution							
Standards		EN50117		2-4		2-4		2-4	
CPR Class acc. to		UE 305/2011		Eca		Eca		Dca s2, d2, a1	
CABEL Code		SAT501 -N		SAT50M -N		SAT703ZH		SAT703B -N	
RG Ref.		RG59EU		RG6EU		RG6+		RG6+	
CONSTRUCTION DATA		SAT501 -N		SAT50M -N		SAT703ZH		SAT703B -N	
Inner Conductor		Ø mm		Ø mm		Ø mm		Ø mm	
material		Cu		Cu		Cu		Cu	
Dielectric		Ø mm		Ø mm		Ø mm		Ø mm	
material		PEG		PEG		PEG		PEG	
Screen		3,50		4,75		4,80		4,80	
1. Film Foil Laminate		APA		AP		APA		APA	
2. Braid		CuSn		CuSn		CuSn		CuSn	
Braid Optical Coverage		%		%		%		%	
Ø mm		4,00		5,22		5,30		5,30	
Protection Jacket		Ø mm		Ø mm		Ø mm		Ø mm	
material		PVC		PVC		LSZH		PVC	
Outer Sheath		Ø mm		Ø mm		Ø mm		Ø mm	
material		PVC		PVC		LSZH		PVC	
Non Migrating film		material		material		material		material	
External Sheath		Ø mm		Ø mm		Ø mm		Ø mm	
material		PVC		PVC		LSZH		PVC	
PHYSICAL DATA		SAT501 -N		SAT50M -N		SAT703ZH		SAT703B -N	
Copper Contents		kg/km		kg/km		kg/km		kg/km	
Cable Weighth		kg/km		kg/km		kg/km		kg/km	
Min. Bending Radius 1/n		mm		mm		mm		mm	
Max. Tensile Strength		N		N		N		N	
ELECTRICAL DATA		SAT501 -N		SAT50M -N		SAT703ZH		SAT703B -N	
Impedance		Ohm		Ohm		Ohm		Ohm	
Capacitance		pF/m		pF/m		pF/m		pF/m	
Velocity Ratio		%		%		%		%	
Attenuation (at 20°C)		dB/100m		dB/100m		dB/100m		dB/100m	
f 5 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 10 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 30 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 50 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 200 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 300 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 470 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 862 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 1000 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 1750 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 2150 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 2400 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
f 3000 MHz		dB/100m		dB/100m		dB/100m		dB/100m	
Structural Return Loss (SRL)		dB		dB		dB		dB	
f 5 - 470 MHz		dB		dB		dB		dB	
f 470 - 1000 MHz		dB		dB		dB		dB	
f 1000 - 2000 MHz		dB		dB		dB		dB	
f 2000 - 3000 MHz		dB		dB		dB		dB	
Transfer Impedance (Zt)		Class		Class		Class		Class	
f 5 - 30 MHz		mΩ/m		mΩ/m		mΩ/m		mΩ/m	
Screening Attenuation (SA)		Class		Class		Class		Class	
Typical Value		dB		dB		dB		dB	
DC Resistance inner/outer		Ohm/km		Ohm/km		Ohm/km		Ohm/km	
Loop Resistance		Ohm/km		Ohm/km		Ohm/km		Ohm/km	
Sheath Insulation Voltage		kV		kV		kV		kV	
Max. Curret (I eff)		A		A		A		A	
Standard Packing		mode		mode		mode		mode	
Put-up		coil		coil		coil		coil	
Unit Length		m		m		m		m	
Unit Packing Content		m		m		m		m	
Packing Pattern		mod.		mod.		mod.		mod.	
Fits CABLEBOX		item		item		item		item	

# HYBRID COAXES - For special applications



2-4 Eca	2-4 Eca	2-5 Fca
<b>SAT501 AWG</b> RG59EU	<b>SAT50M DF2N</b> RG6EU	<b>11/48LO PIPE</b> RG6+
0,8	1	1,13
Cu	Cu	Cu
PEG	PEG	PEG
3,50	4,75	4,80
APA	AP	Cu/Pet
CuSn	CuSn	Cu
47	38	53
4,0	5,22	5,3
Twisted Pair 1x2x24AWG Ø 0,51Cu Ø 1,10PE	Twisted Pair 1x2x24AWG Ø 0,51Cu Ø 1,10PE + Electrical Leads 2x0,5 sq.mm	Empty Tube HDPE inner Ø 5,5 outer Ø 7,2
5,00	6,60	7,30
PVC	PVC	PE
Pet	Pet	-
6,0x8,2	9,8x11,5	8,1x15,3
PVC	PVC	PE
12,5	24	20,5
44,7	92	76,6
25/50	35/70	50,0
90	150	200
75±3	75±3	75±3
52±2	54±2	52±2
85	82	85
2,3	2	1,5
2,8	2,8	2,1
4,6	3,8	2,9
5,6	4,6	3,8
10,9	8,6	7,9
13,7	10,5	9,7
17,4	13,6	12,0
23,3	18,8	16,8
25,2	20,4	17,9
34,0	27,8	24,8
38,2	31,1	27,3
40,4	33,3	29,1
44,2	37,7	33,0
> 30	> 30	> 30
> 28	> 28	> 28
> 26	> 26	> 26
> 22	> 22	> 22
C	n.c.	B
< 23	< 85	< 11
B	B	A
> 100	> 85	> 100
35 / 26	22,5 / 33	18 / 14,8
61	55,5	32,8
2,5	3	8
4	6	8
reel	reel	drum
200	100	400
400	200	400
R200L	R100L	PD400
DS250	DS250	-

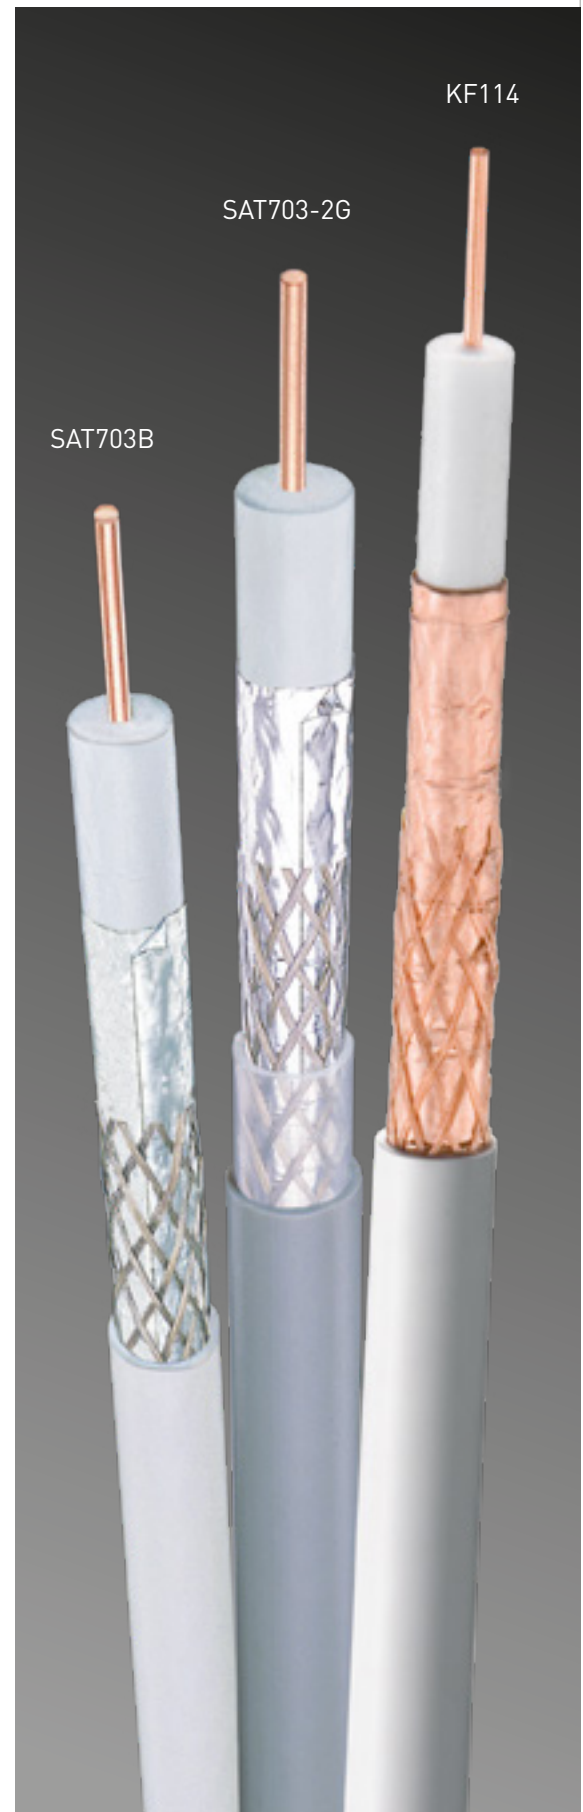

## SMATV MULTICORE COAXIALS - Multiswitch 1st IF Distribution

### Application

SMATV Multiswitch 1st IF Distribution of Satellite and Digital Terrestrial reception and distribution;  
4K-UltraHD resolution; LTE protection

### Standards

EN50117

2-4

2-4; 2-5

2-4; 2-5

2-4

2-4; 2-5

2-4; 2-5

### CPR Class acc. to

UE 305/2011

Eca

Eca

Eca

Eca

Eca

Eca

### Construction

2x

5x

9x

2x

5x

9x



### CAVEL code

2x DG80

5x DG80M

9x DG80M

2x 17VAtC

5x 17VAtCM

9x 17VAtCM

### CONSTRUCTION DATA

#### Central Filler

A

material

-

white PVC

-

white PVC

#### Single cable

B

code

DG80 (1)

DG80 (1)

17VAtC (2)

17VAtC (2)

#### Single Cable's Sheath

-

material

-

white PVC with coloured stripes

-

white PVC with coloured stripes

#### Spirally Wrapped Film

C

material

-

Pet

-

Pet

#### Outer Sheath

E

material

white PVC

black LSZH

white PVC

black LSZH

#### Inner Diameter

D1

mm

-

13,60

18,55

-

18,45

24,85

#### Outer Diameter

D2

mm

5x11,00

15,00

19,80

6,8x14,6

20,00

26,20

### PHYSICAL DATA

#### Copper Content

kg/km

22,3

57,4

101,7

28,9

72,5

133,6

#### Cable Weight

kg/km

56,3

216,2

364,2

81,7

360,0

670,0

#### Min. Bending Radius 1/n

mm

25/50

75/150

100/200

35/70

100/200

130/260

#### Max. Tensile Strength

N

180

800

1.400

300

800

1.400

### Standard Packing

#### Put-up

mode

reel

drum

drum

reel

drum

drum

#### Unit Length

m

100

100

100

100

100

50 100

#### Unit Length Weight

kg

6,3

26,6

36,4

8,8

41,0

40,5 74,7

#### Unit Packing Content

m

200

100

100

200

100

50 100

#### Packing Pattern

mod.

R100L

PD 100

PD 100

R100L

PD100

PD50 PD100

#### Fits CABLEBOX

item

DS250

-

-






DS250

-

-

(1) single cable's data at page 12

(2) single cable's data at page 16





Both single and community satellite reception systems are often provided with a dual-feed parabolic antenna, i.e. where the satellite dish is provided with two LNBs, suitable for receiving signals from two different satellites or groups of satellites. In this case the drop line requires two coaxial cables, one for each LNB. Furthermore, the multiswitch distribution system makes it possible to independently distribute, among all users in the same building, a wide range of both satellite and terrestrial TV signals. For this reason the need for the so-called "light cabling system" is fulfilled by the use of multicore coaxials. Due to this technology the signals distribution requires:

- 4 coaxials for the satellite distribution and 1 coaxial for the terrestrial distribution, where the dish is provided with 1 converter.
- 2 groups of 4 coaxials for the satellite distribution and 1 coaxial for the terrestrial if the dish is provided with 2 LNBs.

We designed the twin and multicore coaxials shown here with the aim of offering the easiest solutions to professional installers. The use of these cables allows installers to save a lot of time when laying the distribution network.

**2x cable** - 2 coaxials for dual feed parabolic antenna

**5x cable** - 4 coaxials for 1 satellite drop line + 1 coaxial for the terrestrial drop line

**9x cable** - 4+4 coaxials for 2 satellite drop lines + 1 coaxials for the terrestrial drop line

#### Twin cables

Both 2xDG80 and 2x17VAtC have just one of the cables printed on the outer sheath; this facilitates the connection of remote poles.

#### Colour Coding of Multicore Coaxial Cables

Each single cable in the bundle has two coloured stripes on the outer sheath, except for the white sheathed cable in the core of the bundle. This makes it easier to identify the cables and insert further remote poles. Furthermore, we have adopted the colour coding system already used by several European manufactures of active and passive components and equipment designed for multiswitch distribution. By convention the following functions have been assigned to this colour coding system.


#### Colour Function

Red	High Band Vertical
Yellow	High Band Horizontal
White	Terrestrial
Green	Low Band Horizontal
Black	Low Band Vertical


#### Multicore coax with multipurpose outer jacket "M"

Initially, these cables were made with a common hard PE jacket, the stiffness of which made their installation quite difficult, if not impossible.

With the aim of making it easier to install these cables in both outdoor and underground applications, they have been provided with a flexible black EVA based outer sheath compound. The M suffix in the code identifies these versions, which entered in production at the beginning of 2010. This jacket is not only flame retardant but also zero-halogen (halogen-free), therefore it is fire-safe and suitable for indoor applications. Outdoor installations are also possible due to the compound's carbon black content and resistance to UV rays. For underground applications we recommend installation in pipes and ducts.

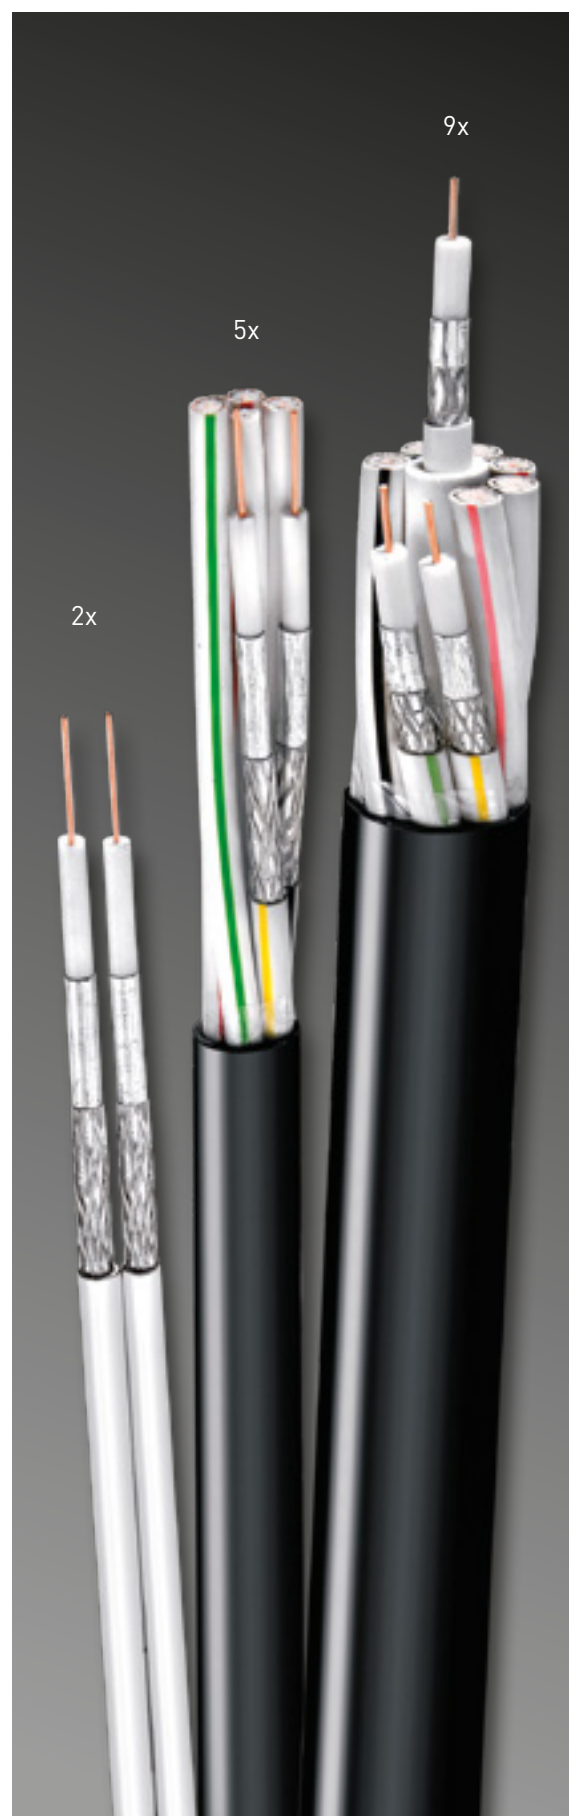

## THE PAST old pack solution

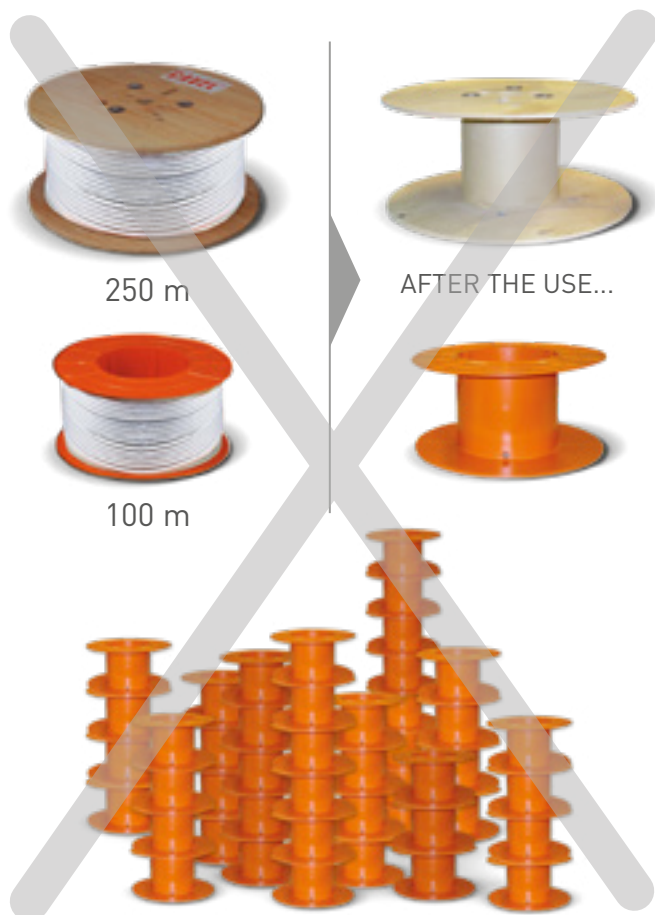

...of just 1 pallet with 12 km of cable, WHAT DO YOU DO WITH:  
48 dirty wooden drums or 120 useless plastic reels?  
**THIS IS A WASTE DISPOSAL PROBLEM!**

### CABLEBOX

The environmentally friendly standard packing

Until recently, coils in a box or non-returnable cardboard and plastic reels were the most popular means of packaging TV coaxial cables. In spite of some inconveniences, these packages were accepted as the norm. Today, due to environmental studies and concerns, the concept of recycling has become a paramount issue, prompting CAVEL to develop a total solution in terms of **EFFICIENCY**, **ECONOMY** and **ECOLOGY**.

This has led to the introduction of a revolutionary product - the CABLEBOX dispenser - a design based on the concepts of **REDUCTION** and **REUTILISATION**.

The CABLEBOX dispenser is made of a stand containing one reel, which can be easily opened into two parts. These pieces, made of a shock resistant, very strong plastic material, form a cable dispenser with a very long life expectancy. The "refill" is represented by the coil of coaxial cable supplied by CAVEL.


The dispensers are available in two sizes, suitable for either the 100 or 250 metre coil of cable. They can be carried and are also provided with a shoulder strap. This is a safety feature that enables the installer to move with both hands free.

The cable will always unroll perfectly without assuming a "spiral shape", an annoying drawback of box dispensers that makes installation in ducts very difficult. This is most useful when installing a bundle of cables together in a conduit. Rewinding excess cable back into the dispenser is very straightforward due to the access through the centre hole.

The sheath of all CAVEL cables supplied in shrinkpack form is provided with a decreasing meter marking, allowing the installer to check the length of a run or drop against the remaining contents of the dispenser. With the CABLEBOX dispenser packing system, there is no reel disposal to consider, only a small piece of shrinkwrap.

Supplying installers with CABLEBOX dispensers offers the following advantages:

- easier installation
- savings on cost and effort
- opportunity to avoid environmental problems
- improved safety.

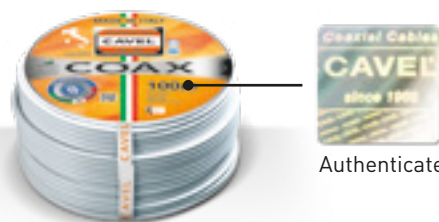

## THE PRESENT new smart pack solution



100 m

SHRUNK COIL



Re-usable reel



DS100 dispenser

**AFTER THE USE...**

of 1 pallet with 14,4 km cable,  
**YOU WASTE JUST FEW hg  
OF PAPER AND PLASTIC.**



**THIS IS A TOTAL  
SOLUTION!**

## STANDARD PACKING SYSTEM

### mod. S100M

6x100m shrunk coils in box = 600m

### mod. S150M

6x150m shrunk coils in box = 900m

fit CABLEBOX DS100

### mod. S200M

6x200m shrunk coils in box = 1.200m



M

### mod. S100L

2x100m shrunk coils in box = 200m

### mod. S150L

2x150m shrunk coils in box = 300m

fit CABLEBOX DS 250

### mod. S250L

2x250m shrunk coils in box = 500m

### mod. S400L

2x400m shrunk coils in box = 800m



L

### mod. R100S

5x100m plastic reels in box = 500m



S

### mod. R100M

5x100m plastic reels in box = 500m

fits CABLEBOX DS 100



M

### mod. R100L

2x100m plastic reels in box = 200m

### mod. R150L

2x150m plastic reels in box = 300m

fit CABLEBOX DS 250

### mod. R200L

2x200m plastic reels in box = 400m

### mod. R250L

2x250m plastic reels in box = 500m



L

### mod. R500XL

1x500m plastic reels in box = 500m



XL

### mod. PD

Plywood drums  
on pallet



PD

### mod. WD

Wooden drums for  
bulk lengths on pallet



WD

## TOOLS AND CONNECTORS



### Coils and Plastic reels Dispensers

CABLEBOX	 DS100	 DS250	
----------	---	---	---

### Accessories for Cable's Preparation

ACCESSORIES	 FC02	 CS00 CS03J CS17VP CS41 CS70	 CS17 - CS22 CS27 - CS34	 MT04	 CK11BL	 LUB01
-------------	--	---	--	---	--	---

### Accessories for Cable's Preparation

COMPRESSION & CRIMP TOOLS	 COT02BL	 COT04BL	 COT05BL	 CRT03BL CRT04BL CRT05BL
---------------------------	---	---	--	---

### F - Crimp Connectors

<b>F</b> Crimp Connectors	 F41 F501 F70	 F703 F125A	 FR703 fast insertion	 F90	 F163
------------------------------	--	---	---	---	--

### F - Twist-On Connectors

<b>F</b> Twist-On Connectors	 FA125	 FA501 FA703	 FA17	 FA17/73
---------------------------------	---	--	--	---

### Compression Connectors


<b>F</b> COMPRESSION	 FC501	 FC703	 FC703C	 FC5.0QMS	 FCEM5.0C	 FC7.0QM	 FCEM7.0C	 FCP05.9C FCP03.1C	 FC11QM
-------------------------	--	--	---	---	--	--	---	---	---

<b>BNC</b> COMPRESSION	 BNCC 3.3C	 BNCC 3.9C	 BNCC 5.1C	 BNCC 70	 BNCC501	 BNCC703
---------------------------	---	---	---	---	--	---

<b>IEC</b> OUTDOOR COMPRESSION	 IECMC703	 IECFC703
--------------------------------------	--	--

<b>IEC</b> INDOOR Self Install - No Tool	 IECF 3.9C IECM 3.9C	 IECF 5.1C IECM 5.1C	 IECF 90SC IECM 905C	 IECM 90C IECF 90C
--	--	--	--	--

### C-BOX Display Box for Connector Jars

<b>C-BOX</b>	A large number of CAVEL connectors is supplied by plastic jars C-Box free of charge available till exhausted.	
--------------	--	---

### Adapters for F Connectors (Indoor)

ADAPTERS	 F81-HQ	 DR01	 FM-FF90	 MM-F703	 MM-FR703 fast insertion
----------	--	--	---	---	--

### Fittings

FITTINGS	 C75-5L	 CCFM75GI	 TV2VS	 SAT2VS
----------	--	--	---	---

### HARD-LINE Connectors for Outdoor and Underground Installation

### Adapters

HARD-LINE CONNECTORS	 FM	 IEC	 NM	 3,5/12"	 5/8"MU	HARD-LINE ADAPTERS	 SP	 SR
----------------------	--	---	--	--	--	--------------------	--	--

# CAVEL on the web!



The screenshot displays the CAVEL website interface. On the left, there's a sidebar with navigation links like 'Home', 'About Us', 'Contact Us', and 'Products'. The main content area is titled 'BROADBAND COAXIAL CABLES' and lists various cable types such as 'RG6', 'RG7', 'RG8', and 'RG11'. Each type has a corresponding image and a brief description. Below this, there are detailed technical specifications for each cable type, including dimensions, materials, and performance metrics. The right side of the page features a 'Special WEB Utility to research Tools and Connectors' section, which provides links to various tools and connectors available for purchase or research.

## A Special WEB Utility to research Tools and Connectors

The new cavel.com web site is first and foremost realized with a search engine by code, or by type of product. Then, once you have landed on the cable specs. card you are interested in, you can move on to it using a particular configuration of 5 menus under the card, to access many useful details, dedicated to the accessories of the cable in question, such as:

- the standard types of Packing available and the corresponding item number
- the compatible Stripper
- the wide range of Connectors, subdivided into sub-menus for indoor and outdoor installation and both with an automatic link to the appropriate crimp or compression tool (Pliers), just in case it is necessary for the use of the connector in question
- the Adapters
- some other installation accessories (Tools)

## LEGEND

Al	Aluminium	LSZH-FR+	Stabilized Low Smoke Zero Halogen Flame Retardant compound
AP	Al/Polyester	N	Newton (0,1 kg approx.)
APA	Al/Polyester/Al	n.a. - n.c.	not applicable - not classified
APAS	Al/Polyester/Al/Surline(glue)	PE	Polyethylene
AP-J	Al/Polyester - "J folded"	PEG	Gas Injected Physical Foam PE
APS	Al/Polyester/Surline(glue)	Pet	Polyester
AWG	American Wire Gauge	PJ	Petrol Jelly filling compound
CCA	Copper Clad Aluminium	PVC	Poly-Vinyl-Chloride
CCS	Copper Clad Steel	PVC II	Non-Migrating PVC Compound
Cu	Copper	RG11	size 1,63 / 7,20 mm
Cu/Pet	Copper/Polyester	RG59EU	size 0,80 / 3,50 mm
CuSn	Tinned Copper	RG6	size 1,00 / 4,60 mm
FeCu	Copper Clad Steel (CCS)	RG6EU	size 1,00 / 4,80 mm
FeZn	Zinc Plated Steel	RG6+	size 1,13 / 4,80 mm
LSZH	Low Smoke Zero Halogen compound	SA	Screening Attenuation
LSZH-FR	Low Smoke Zero Halogen Flame Retardant compound	TI	Tranfer Impedance [Zt]

## LIMIT OF RESPONSIBILITY

Every care has been taken to ensure that the information contained in this publication is correct. No legal responsibility can be accepted for any inaccuracy. The company reserves the right to alter or modify the information contained herein at any time. The coaxial cables illustrated in this catalogue must be used solely for the purposes for which they were expressly designed, which is the reception and distribution of audio, video and data signals. Any other use is deemed to be inappropriate and our approval should be sought for alternative applications. The manufacturer and the seller decline all responsibility for any problems that may occur due to improper, incorrect and unreasonable use.



CERTIFIED COMPANY  
UNILAB ISO 9001:2015  
CERT. NR. 9125/CON



ITALIANA CONDUTTORI Srl  
Viale Zanotti, 90 - 27027 Gropello Cairoli (Pavia) Italy  
Tel. +39 0382 815150 - Fax +39 0382 814 970

[www.cavel.com](http://www.cavel.com)  
[cavel@cavel.it](mailto:cavel@cavel.it)